


DIN 7516/A

VITE AUTOMASCHIANTE E TESTA CILINDRICA IMPRONTA 6 LOBI

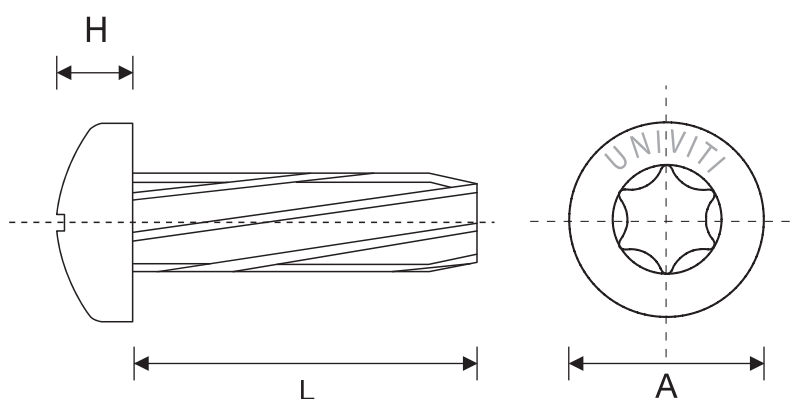

M	3	4	5	6	8
A	6	8	10	12	16
H	2,4	3,1	3,8	4,6	6
mis. ins.	1	2	2	3	4
mis. ins. 6 lobi	T10	T20	T25	T30	T40
foratura	2,7	3,6	4,5	5,5	7,4