


## DIN 6925

### DADO AUTOBLOCCANTE INTERAMENTE METALLICO

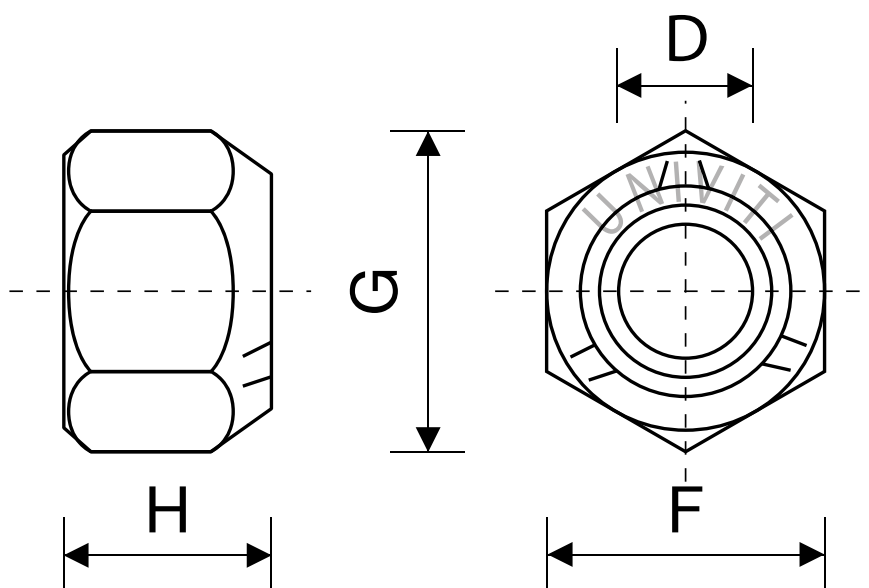

<b>D</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>	<b>10</b>
<b>F</b>	5,5	7	8	10	11	13	16
<b>H</b>	3,7	4,2	5,1	6	7	8	10
<b>G</b>	6,01	7,66	8,79	11,05	12,12	14,38	17,77
<b>D</b>	<b>12</b>	<b>14</b>	<b>16</b>	<b>20</b>	<b>24</b>	<b>30</b>	<b>36</b>
<b>F</b>	18	21	24	30	36	46	55
<b>H</b>	12	14	16	20	24	30	36
<b>G</b>	20,03	23,35	26,75	32,95	39,55	50,85	60,79