


DIN 980 (ISO~7042)

DADO AUTOBLOCCANTE INTERAMENTE METALLICO

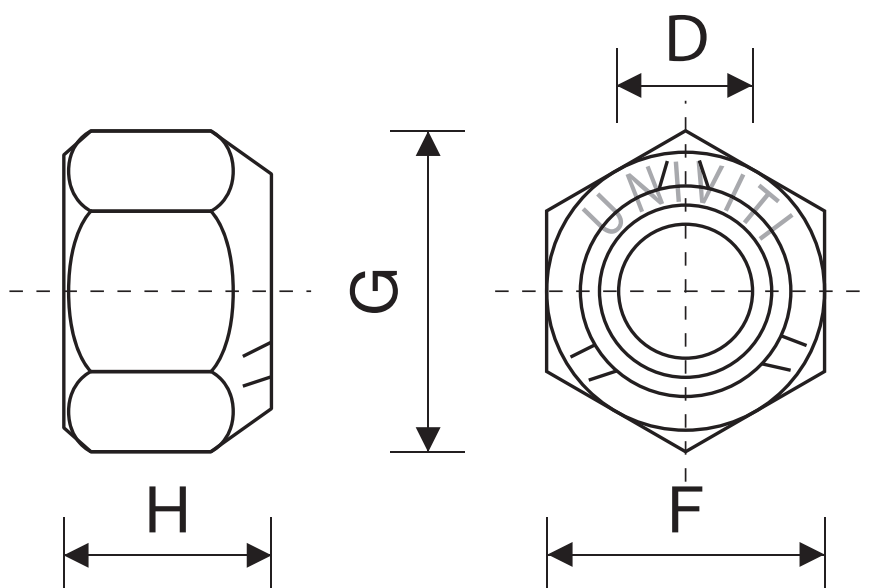

D	4	5	6	8	10	12
G min	7,66	8,79	11,05	14,38	18,9	21,1
H max	4,2	5,1	6	8	10	12
F max	7	8	10	13	17	19
D	14	16	18	20	22	24
G min	24,49	26,75	29,56	32,95	35,03	39,55
H max	14	16	18	20	22	24
F max	22	24	27	30	32	36