


ISO 7380/FL

VITE A TESTA BOMBATA CON FLANGIA ED ESAGONO INCASSATO

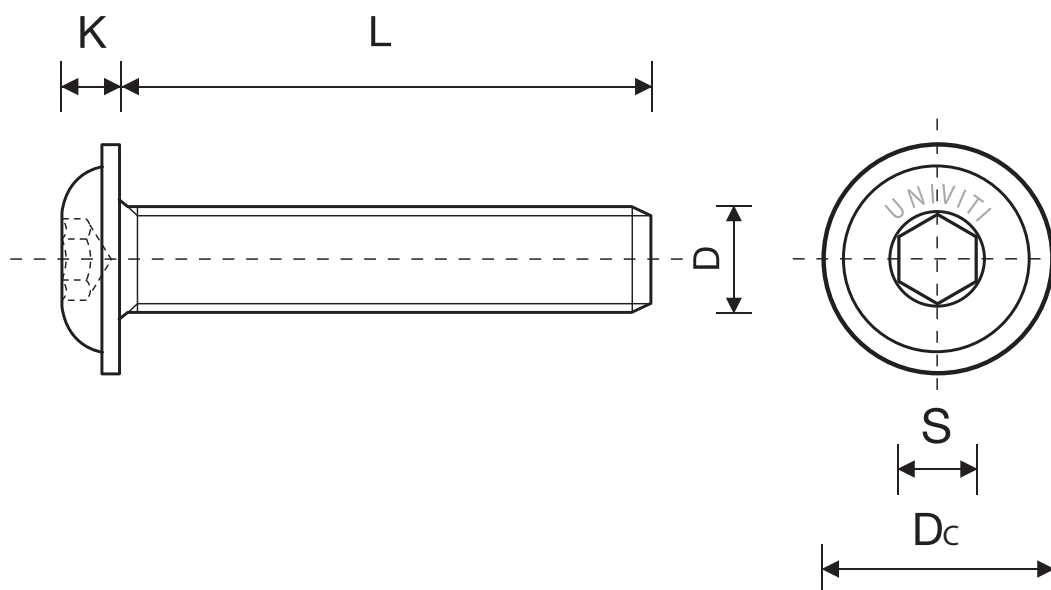

M	3	4	5	6	8	10	12	16
Dc	6,9	9,4	11,8	13,6	17,8	21,9	26	/
K	1,65	2,2	2,75	3,3	4,4	5,5	6,6	8,8
S	2	2,5	3	4	5	6	8	10