


DIN 7991 UNI 5933 ISO 10642

VITE A TESTA PIANA SVASATA CON ESAGONO INCASSATO IMPRONTA 6 LOBI

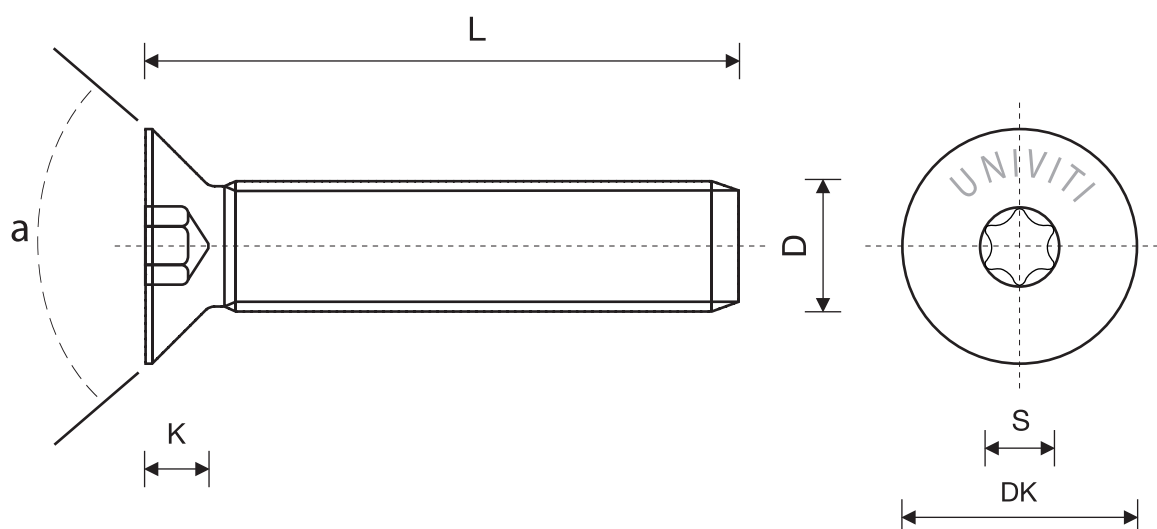

M	3	4	5	6	8	10
DK	6,72	8,96	10,2	13,44	17,92	22,4
K	1,86	2,48	3,1	3,72	4,96	6,2
S	2	2,5	3	4	5	6
mis. ins. 6 lobi	/	T20	T25	T30	T40	/
a	90°	90°	90°	90°	90°	90°
B	18	20	22	24	28	32
M	12	14	16	20	22	24
DK	26,8	30,88	33,6	40,32	36	39
K	7,44	8,4	8,8	10,16	13,1	14
S	8	10	10	12	14	14
mis. ins. 6 lobi	/	/	/	/	/	/
a	90°	90°	90°	90°	60°	60°
B	36	40	44	52	56	60