


DIN 7968

VITE CALIBRATA A TESTA ESAGONALE

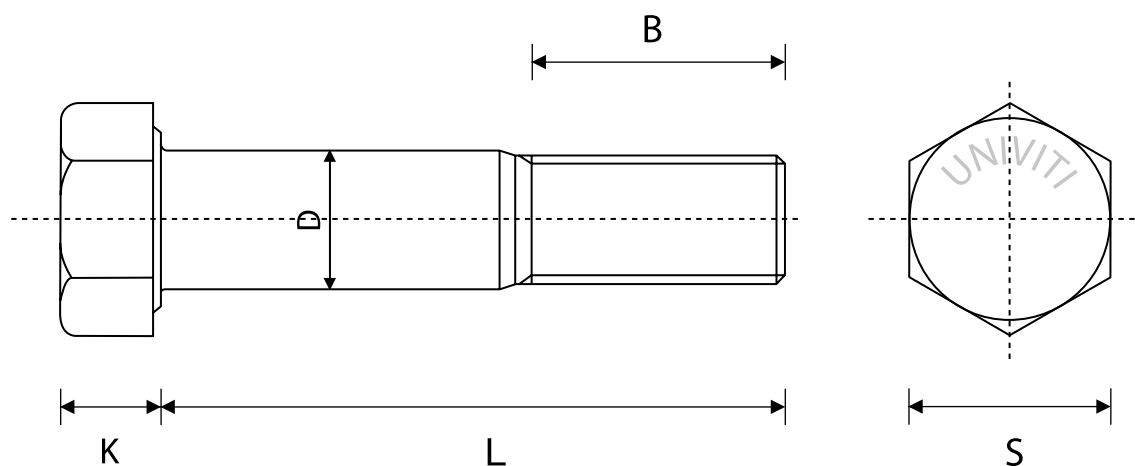

M	12	16	20	24	27	30
B	20,5	24,5	28,5	33	35,5	38,5
K	8	10	13	15	17	19
D	12,74	16,74	20,71	24,71	27,71	30,67
S	18	24	30	36	41	46